


### SPECIFICATION DATA SHEET

DAT 15-Sep-11

TYPE	5x3.2 SMD Crystal
Part Number	ASX5F-26M-FA160A3
Nominal frequency	26.000000 MHz
Mode	Fundamental
Frequency tolerance (at 25±3°C)	± 10 ppm
Frequency Stability (vs. 25°C)	± 10 ppm
Operating Temperature	-20°C ~+ 70°C
Storage Temperature	-55°C ~+ 125°C
Aging Rate	± 3 ppm/ Year
Test Circuit	S & A 350A with π fixture
Load capacitance	16 pF
Drive level	100 μW
Equivalent Series Resistance	50 Ω Max
Shunt Capacitance (C0)	7 pF

### OUTLINE DIMENSIONS

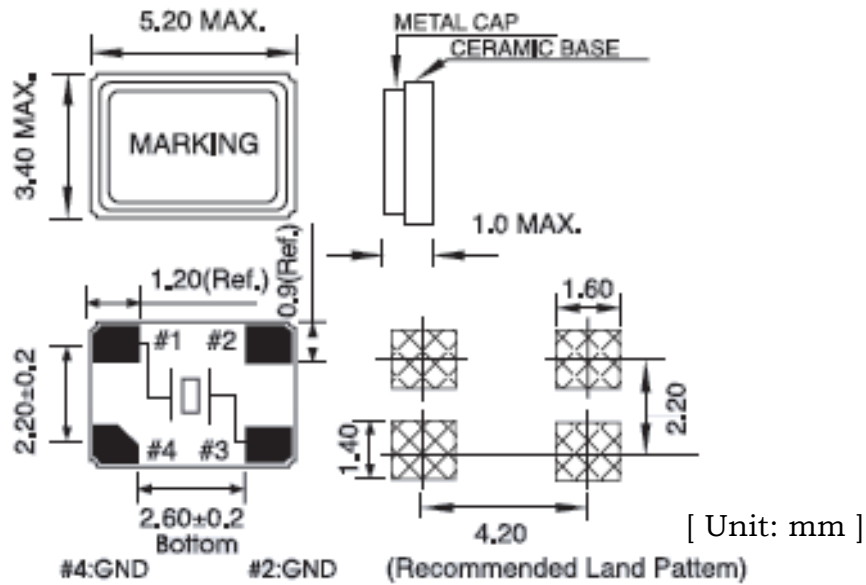

Remarks: Marking by our standard laser marking.

\* We reserved the right to change the content anytime.